




Type	C5-R2x/ ... V Magnetic latching – Remanence relays 2 change-over contact, 10A	
-------------	--	--

Maximum contact load	10 A/400 V AC1 0,2 A/250 V DC1	10 A/30 V DC1 0,5 A/110 V DC1
-----------------------------	---	--

Contacts			
Material	Standard	Code 0	AgNi
Rated current			10 A
Switch-on current max. (20 ms)			30 A
Switching voltage max.			400 V
AC load (Fig 1)			4 kVA
DC load			see Fig. 2

Coil	
Coil resistance	see table; tolerance ± 10 %
ON pulse power	1,5 VA/W
OFF pulse power	0,5 VA/W
1 winding for AC, 2 winding for DC	
Pull-in ON/OFF	< 0,8 x U _N

Internal Diagram:



Coil table

VAC	mA ON	mA OFF	VDC	mA ON	mA OFF
24	75	12	12	125	41
48	38	6	24	63	21
115	16	2,5	48	31	10
230	8	1,3	110	14	4,5

Insulation	
Coil resistance	Volt rms, 1 min
Contact open	1000 V
Contact/contact	4 kV
Contact/coil	4 kV
Insulation resistance at 500 V	≥3 GΩ
Insulation, EN 60947/IEC 61810-1	4 kV/3

Specifications	
Ambient temperature operation/storage	-40 (no ice)...60 °C /-40 ... 80 °C
Minimum pulse ON/OFF	50 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	95 g

Standard types
VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)

C5-R20/AC ... V

VDC : 12, 24, 48, 110,

C5-R20/DC ... V

"..." Enter the voltage for full type designation

Accessories

Socket: **S5-S, S5-L, S5-P, S5-P0, S5-M**
Optional accessories (blinking plug): **SO-NP, SO-OP**

Connection diagram




Fig. 1 AC voltage endurance



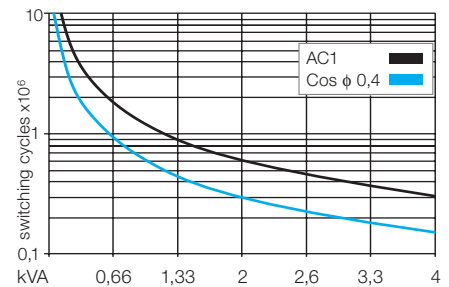


Fig. 2 DC load limit curves

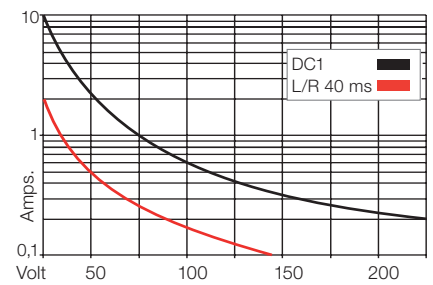

Dimensions [mm]

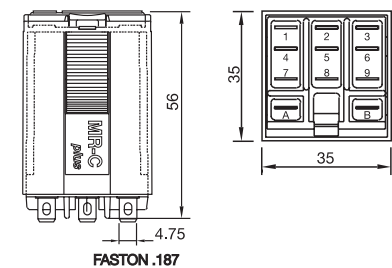

Technical approvals, conformities



IEC 61810, EN 60947