



S5-L, S5-P, S5-PO

Socket for soldering and printed circuit for relays C5-...


Type	S5-L 3-pole, flange panel mountable
	S5-P 3-pole, printed circuit
	S5-PO 3-pole, printed circuit with flange
Rated current	16 A
Specifications	
Rated load	16 A / 400 V
Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C
Accessories	
Retaining spring, steel	S4-L

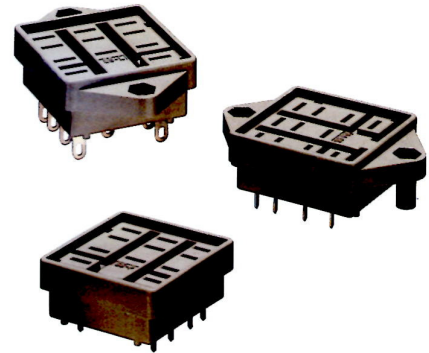

Printed circuit lay-out [mm]



Dimensions [mm]

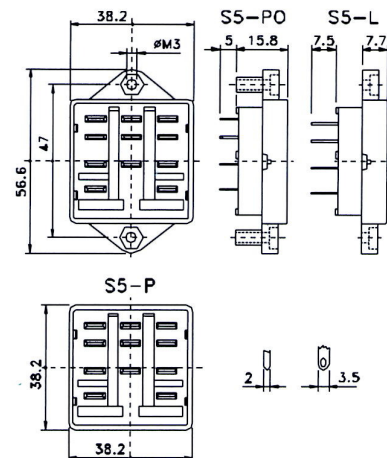

Technical approvals, conformities



EN 60947-1, EN 61810-1