

# S5-M

## Socket for square base relay C5-...




**Type:** **S5-M**  
 3-pole, 3 level  
 Module slot for timer- and monitoring modules,  
 over voltage suppressing- and LED  
 indicator modules  
 coil bridge bus bar to connect in A2


**Rated current** **16 A**

**Specifications**

Rated load 16 A / 400 V  
 Insulation Test voltage  $V_{rms}$  / 1 min  
 - All terminal/DIN rail 4 kV  
 - Terminal/terminal 4 kV  
 Cross section of connecting wire  
 - Single wire 1 x 6 mm<sup>2</sup>, 2 x 2,5 mm<sup>2</sup>  
 - Multi wire 1 x 6 mm<sup>2</sup>/AWG10, 2 x 1,5 mm<sup>2</sup>/AWG16  
 Max. screw torque 1,2 Nm  
 Screw dimensions M3,5, Pozi. slot  
 Labelling space detachable  
 Connection label 1 ... 12, DIN/EN  
 Mounting DIN rail TS35 or panel mounting 1 x M4  
 Ambient temperature operation / storage -40 (no ice) ... 60° C/-40 ... 80° C

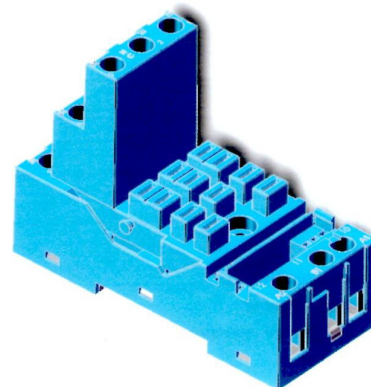

**Connection diagram**

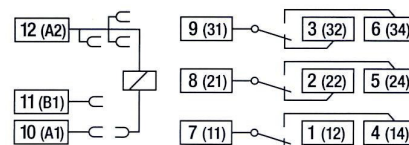


**Associated, plug-in 11-pin MRC relays** **C5-A, C5-G, C5-X, C5-M, C5-R**

**Accessories**

Coil bridge bus bar **C-A2**  
 Retaining spring, steel **HF-32**

**Dimensions [mm]**

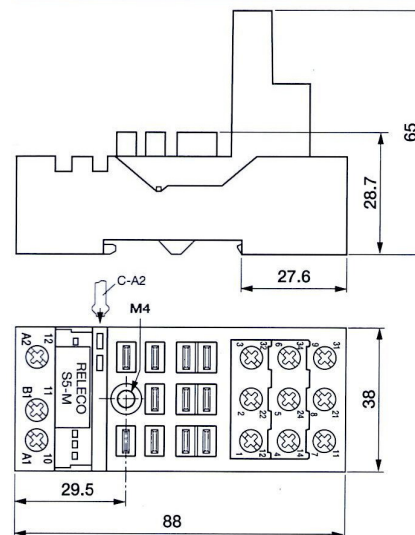

**Technical approvals, conformities**

