

S5-S**Socket for square base relay C5-...**

Type	S5-S 3-pole, 2 level Logic wiring Integrated retaining clip and labelling space
-------------	---

Rated current	16 A
----------------------	-------------

Specifications

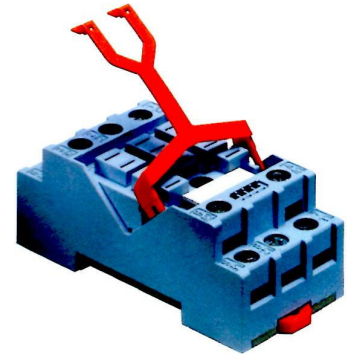
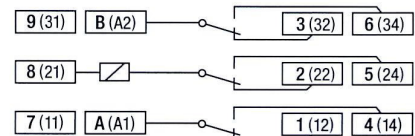
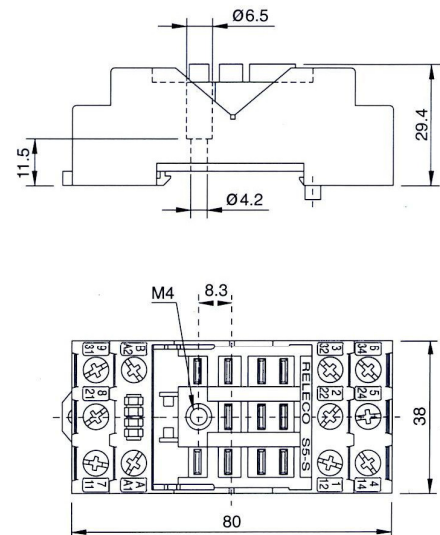
Rated load	16 A / 400 V
Insulation	Test voltage V rms / 1 min
- All terminals/DIN rail	4 kV
- Terminal/terminal	4 kV
Cross-section of connecting wire	
- Single-wire	4 mm ² or 2 x 2,5 mm ²
- Multi-wire	22 - 14 AWG
Max. screw torque	1,2 Nm
Screw dimensions	M3,5, Pozi, slot
Integrated retaining clip/plastic	for relay series C5
Labelling space	detachable
Connection label	1...9, A, B; DIN/EN
Mounting	DIN rail TS35 or mounting plate
Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C

Associated, plug-in 11-pin MRC relays	C5-A, C5-G, C5-X, C5-M, C5-R
--	-------------------------------------

Mounting in DIN rail TS35 or mounting plate. Labelling space.
According to EN 60947 and IEC 61810

Accessories

Retaining spring, steel	S4-C
-------------------------	-------------

**Connection diagram****Dimensions [mm]****Technical approvals, conformities**

EN 60947-1, EN 61810-1