

QRC series

S9-L, S9-P, S9-PO


Socket for PCB and soldering for miniature relays C9




Type	S9-L 4-pole, flange panel mountable
	S9-P 4-pole, printed circuit
	S9-PO 4-pole, printed circuit with flange
Rated current	6 A

Specifications


Rated load	6 A / 250 V
Dielectric strength adjacent pin	2.5 kV rms / 1 min
Connection label	1...14; DIN/EN
Integrated retaining clip/plastic	for relay series C9
Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C

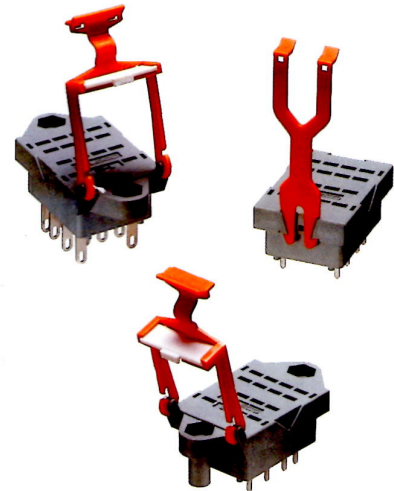

Printed circuit lay-out [mm]



Dimensions [mm]

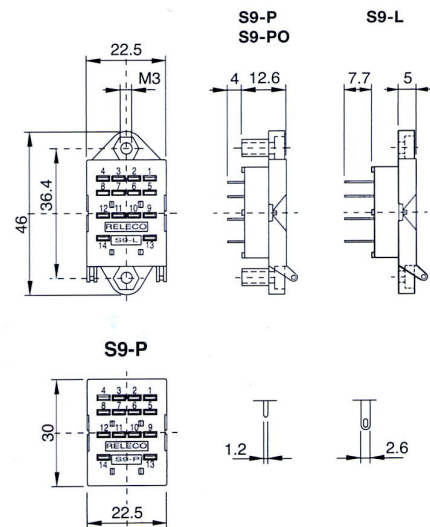

Sockets

4

Technical approvals, conformities



EN 60947-1, EN 61810-1