


3.3 Monitoring Modules

Modular plug-in Monitoring Relays

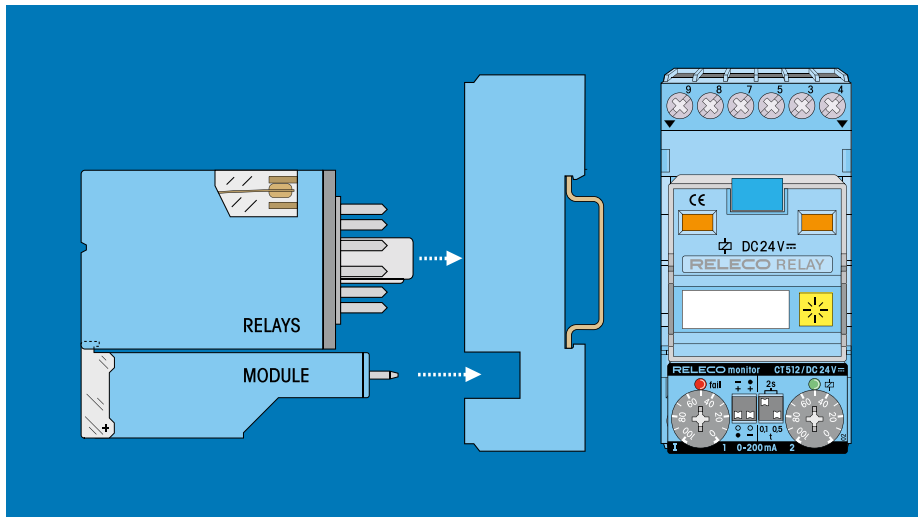

The modular monitoring system consists of individual plug-in monitoring modules with front cover, an 11-pole plug-in relay and a system socket with retaining spring.

The individual combination allows an optimal device selection for the foreseen application.

Later modifications as for example an exchange of relay from mechanical contacts to a relay with solid-state outputs are possible at any time. The user profits of a universal system of worldwide unique flexibility.


Notes



The modular Comat monitoring CT System

The monitoring relays consist of plug-in CT electronic modules and 11-pole output relays. Both system components can be combined in a variety of combinations. This allows adapting the system for the specific application. Subsequent modifications, for example a change from mechanical contacts to solid-state outputs, are possible at any time just by replacing the relay.

This system provides the user a complete universal system with worldwide unmatched flexibility.

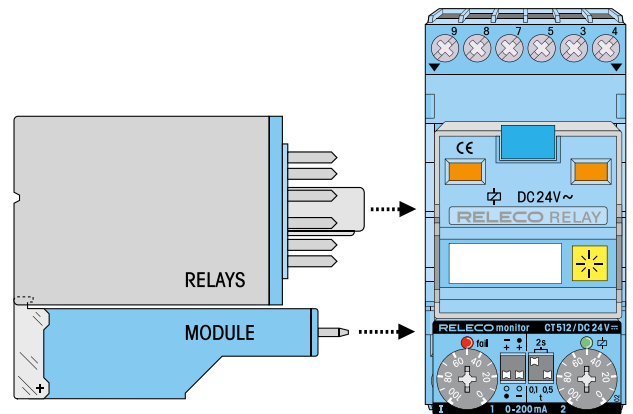

The system sockets C12B0 or CS-155 serve as a basis for the secure reception of the electronic modules. The sockets have a 4-pole module slot in which the CT modules lock firmly and vibration proof also without the output relay. Contact is made with reliable twin knife contacts.

With the A2 connector bridge "C-A2", the neutral conductor (N/-) can be connected from socket to socket. It reduces wiring work considerably.

Robust terminals for wires up to 4mm² and spacious labeling are other advantages of this practical Comat modular system.

Clear markings close to the terminal connections on the sockets make it easy to identify the connections for wiring and servicing.

The CT modules are proof of the practical oriented experiences of Comat in the field of industrial electronics. All control and display elements are arranged easy accessible at all times on the front side of the modules. The functions and settings are self-explanatory schematically illustrated on the front and allow to review the set values also during operation.

A transparent cover over the module setting components provides protection from unintentional settings and additionally links the module to the output relay.

Triggering is performed with the operating voltage. (L1 or +). No potential-free contacts are therefore required. The triggering complies to machine standards. Parallel connection to B1 is admissible.

The output relays show the connection diagram and the technical values on the front side, (exception C3 and C5 relays). A color code indicates an AC coil with red and a DC coil with blue color. Most of the relays have a lockable test button for manual operation.

The standard contacts have proven its reliability for high switching current applications over many years. The contact material AgNi permits a wide switching range and due to the large dimensioning they are designed for a high number of switching cycles. The high breaking capacity of up to 10A/400V and a low load switching capability of 12V/10mA makes the contact suitable for the use in main circuits as well as for low voltage applications.

The twin contacts are switching the load circuit with 2 independent contact tongues. The switching safety for low currents is therefore 100 times higher compared to a single contact relay. Despite the high switching capacity of up to 6A/250V, these contacts are very suitable to switch low currents and voltages up to 1mA/6V.

The solid-state relays are an alternative to mechanical relays. In the standard version, the relay has a potential-free universal semiconductor output for AC or DC loads. The advantage is a bouncing- and wear-free, overload resistant, short circuit protected output with a practical unlimited life cycle.

Solid-state relays are specially recommended for applications of high switching cycles, for example for repeat cycle timers, flushing lights, but also for high inductive switching loads of solenoid valves, couplings, motors, etc. The solid state relays are also suitable for capacitive loads, for example long power lines, or compensated lighting circuits.

Additional protection circuits of the output or of the load are not necessary in any application for this type of Comat relays.

The solid-state relays are insensitive in any aggressive environment such as chemical plants, sewage plants etc. and are therefore an excellent choice for the employment in such environments.



The train symbol indicates products available in a special railway execution according EN 50155. Please refer to our special railway brochure for details.



CT512, CT515, CT516

Plug-in current monitoring modules (combined with industrial relays)
0.2 A, 2 A, 6 A. DC 24 V operation




Type	Blue: CT512, CT515, CT516 /24V R	CT512R, CT515R, CT516R /36V R
	Green: CT512, CT515, CT516 /24V	CT512R, CT515R, CT516R /36V

Plug-in current monitoring modules for sockets with module slot in combination with plug-in relays. DC 24 V operation. LED alarm state indicators for OK and fail.
 Separate adjustment of upper and lower level.



Monitoring functions

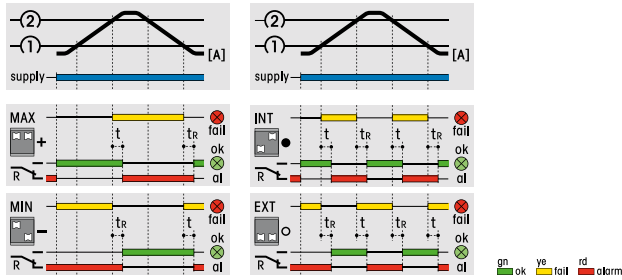

Over / under voltage internal / external range

Measuring circuit data

Type	CT512	CT515	CT516
Measuring and setting ranges (rotary knobs)	0 ... 200 mA	0 ... 2 A	0 ... 6 A
Max. current 100% duty cycle	300 mA	3 A	7 A
Voltage drop on internal shunt res. @ I _{max}	300 mV	200 mV	100 mV
Temperature drift -25 ... 60 °C	≤ 3 %	≤ 3 %	≤ 3 %

Time data

Alarm delay time settings	100 ms, 500 ms, 2 s
Reset time	100 ms


Power supply

	DC 24 V	DC 36 V
Nominal voltage	18 ... 30 V	18 ... 45 V
Operation voltage range	3 ... 7 mA	5 mA
Supply current	- 30 V	- 51 V
Polarity reversal protection		


General specifications

Ambient temperature storage/operation	-40 ... 85 °C / -25 ... 60 °C
Ingress Protection degree	IP 40 when plugged in
Housing material	Lexan
Weight	25 g

Connection diagram



Dimensions [mm]

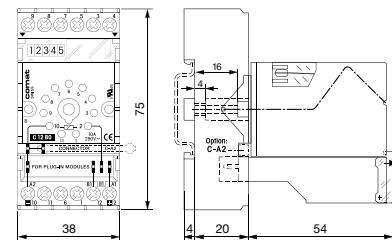

Standard types

CT512/, CT515/, CT516/ DC24	Blue CT51x/DC24V R	Green CT51x/DC24V
-----------------------------	-----------------------	----------------------

Railway types:

CT512R/, CT515R/, CT516R/ DC24		CT51xR/DC24V
CT512R/, CT515R/, CT516R/ DC36		CT51xR/DC36V

Remark: This module is part of several ready for connection units consisting of socket, relay and module.
 A wide variety of suitable relays is available.

Technical approvals, conformities




CT524


Plug-in DC voltage monitoring module. DC 24 V operation.
(combined with industrial relays)

Type **Blue:** **CT524/24V R**
 Green: **CT524/24V**

Plug-in DC voltage monitoring module for sockets with module slot in combination with 11p plug-in relays. DC 24 V operation. LED alarm state indicators for OK and fail.
Separate adjustment of upper and lower level.



Monitoring functions

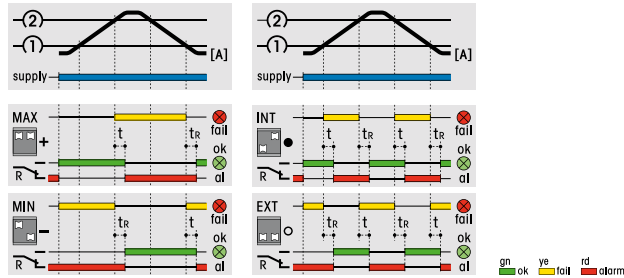

Over / under voltage internal / external range

Measuring circuit data

Type	CT524
Measuring and setting ranges (rotary knobs)	0 ... 30 V
Over voltage (10 ms)	± 150 V
Input resistance	106 kΩ
Temperature drift -25 ... 60 °C	≤ 2 %

Time data

Alarm delay time settings	100 ms, 500 ms, 2 s
Reset time	100 ms

Power supply

Nominal voltage	DC 24 V
Operation voltage range	18 ... 30 V
Supply current	8 ... 13 mA
Polarity reversal protection (1 minute)	- 30 V

General specifications


Ambient temperature storage/operation	-40 ... 85 °C / -25 ... 60 °C
Ingress Protection degree	IP 40 when plugged in
Housing material	Lexan
Weight	25 g

Standard types


DC 24	Blue	Green
	CT524/DC24V R	CT524/DC24V

Remark: This module is part of several ready for connection units consisting of socket, relay and module.
A wide variety of suitable relays is available.

Connection diagram




Dimensions [mm]

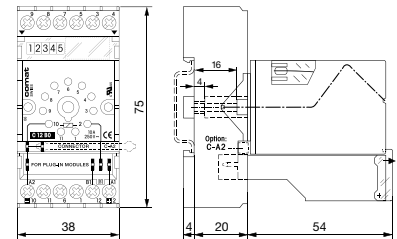

Technical approvals, conformities





DC Voltage Monitoring-Set
DC Current Monitoring-Set

- Set-Delivery includes:
- Relay
 - Module
 - Front cover
 - Socket
 - Retaining clip



Monitoring Module

4 functions can be selected:
Overvoltage/undervoltage monitoring with adjustable hysteresis or 2 range monitors (INT or EXT). Adjustable alarm delay. LED display for errors and ok. Contact inspection window at the top. Manual safety operation.

Relay data's see:
Section Industrial Relays




Data at Tamb. = 20°C


Alarm delay t	0,1/0,5/2s
Reset time tR	100ms
Voltage tolerance	0,8...1,2Un
Power consumption	≤0,5W
Ambient temperature	-25...+60°C

CT524
DC Voltage Monitoring

Range: 0-30V
Umax: 40V



Triggering



Input resistance
B1 → A2: 100kΩ

Set Order-Nr.:
CT524.3-A30/DC24V R

- Delivery includes:
- Relay C3-A30X/DC24V
 - Module CT524/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

Set Order-Nr.:
CT524.3-T31/DC24V R


- Delivery includes:
- Relay C3-T31X/DC24V
 - Module CT524/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

Set Order-Nr.:
CT524.3-T32/DC24V R


- Delivery includes:
- Relay C3-T32X/DC24V
 - Module CT524/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

CT512
DC Current Monitoring

Range: 0-200mA
Imax: 300mA



Triggering



Voltage drop
A1 → B1 ≤ 300mV

Set Order-Nr.:
CT512.3-A30/DC24V R

- Delivery includes:
- Relay C3-A30X/DC24V
 - Module CT512/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

Set Order-Nr.:
CT512.3-T31/DC24V R


- Delivery includes:
- Relay C3-T31X/DC24V
 - Module CT512/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

Set Order-Nr.:
CT512.3-T32/DC24V R


- Delivery includes:
- Relay C3-T32X/DC24V
 - Module CT512/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

CT515
DC Current Monitoring

Range: 0-2A
Imax: 3A



Triggering



Voltage drop
A1 → B1 ≤ 200mV

Set Order-Nr.:
CT515.3-A30/DC24V R

- Delivery includes:
- Relay C3-A30X/DC24V
 - Module CT515/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

Set Order-Nr.:
CT515.3-T31/DC24V R


- Delivery includes:
- Relay C3-T31X/DC24V
 - Module CT515/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

Set Order-Nr.:
CT515.3-T32/DC24V R


- Delivery includes:
- Relay C3-T32X/DC24V
 - Module CT515/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

CT516
DC Current Monitoring

Range: 0-6A
Imax: 7A



Triggering



Voltage drop
A1 → B1 ≤ 100mV

Set Order-Nr.:
CT516.3-A30/DC24V R

- Delivery includes:
- Relay C3-A30X/DC24V
 - Module CT516/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C



Set Order-Nr.:
CT516.3-T31/DC24V R

- Delivery includes:
- Relay C3-T31X/DC24V
 - Module CT516/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C

Set Order-Nr.:
CT516.3-T32/DC24V R

- Delivery includes:
- Relay C3-T32X/DC24V
 - Module CT516/DC24V R
 - Front cover FS-R
 - Socket C12B0 R
 - Retaining clip S3-C


Power Relay





C3-A30X

Universal
Power Relay 10A.
With 3 power changeover-contacts this is the robust relay for AC and DC circuits ranging from 10mA 10V.

10A 250V~
10mA 10V




Control Relay





C3-T31X

Relay with 3 twin contacts 6A
The control relay with highest switching reliability for control and signal circuits ranging from 5mA 5V.

6A 250V~
5mA 5V




Signal Relay





C3-T32X

Relay with 3 twin contacts, 10μ gold flush
The twin contact relay with highest switching reliability for signal circuits ranging from 1mA 5V. Recommend. upto 0,2A 30V.

6A 250V~
1mA 5V




Power Relay





C31L

Universal Power Relay 10A
with 3 power changeover-contacts
this is the robust relay for AC and
DC circuits ranging from
50mA 10V.

10 A 250V~
50mA 10V




Control Relay





C32L

Relay with 3 twin contacts 6A
The control relay with highest
switching reliability for control
and signal circuits ranging from
10mA 5V.

6 A 250V~
10mA 5V




Power Relay





C33

Double-channel Power Relay 10A
With 2x1 power changeover-
contacts this is a robust relay for
AC and DC circuits ranging from
10mA 12V.

10 A 250V~
10mA 12V




Control Relay




C34

Double-channel Control Relay 5A
With 2x1 changeover-contact.
The control relay with increased
switching reliability for control and
signal circuits from 1mA 6V.

5 A 250V~
1mA 6V




Power- and Signal Relay



C39

Triple-channel Twin Contact Relay 5A
with 3x1 NO contact. Ideal for
interface applications ranging from
1mA 100mV.
LED display for each channel.

5 A 250V~
1mA 100mV



Set Order-Nr.:

CT524.31/DC24V

Delivery includes:

- Relay C31L/DC24V
- Module CT524/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

CT524.31R/...V

DC 24, 36V

Set Order-Nr.:

CT524.32/DC24V

Delivery includes:

- Relay C32L/DC24V
- Module CT524/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

CT524.32R/...V

DC 24, 36V

Set Order-Nr.:

CT524.33/DC24V

Delivery includes:

- Relay C33/DC24V
- Module CT524/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT524.34/DC24V

Delivery includes:

- Relay C34/DC24V
- Module CT524/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT524.39/DC24V

Delivery includes:

- Relay C39/DC24V
- Module CT524/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT512.31/DC24V

- Delivery includes:
- Relay C31L/DC24V
 - Module CT512/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

CT512.31R/...V

DC 24, 36V

Set Order-Nr.:

CT512.32/DC24V

- Delivery includes:
- Relay C32L/DC24V
 - Module CT512/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

CT512.32R/...V

DC 24, 36V

Set Order-Nr.:

CT512.33/DC24V

Delivery includes:

- Relay C33/DC24V
- Module CT512/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT512.34/DC24V

Delivery includes:

- Relay C34/DC24V
- Module CT512/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT512.39/DC24V

Delivery includes:

- Relay C39/DC24V
- Module CT512/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT515.31/DC24V

- Delivery includes:
- Relay C31L/24V
 - Module CT515/24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

CT515.31R/...V

DC 24, 36V

Set Order-Nr.:

CT515.32/DC24V

- Delivery includes:
- Relay C32L/24V
 - Module CT515/24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

CT515.32R/...V

DC 24, 36V

Set Order-Nr.:

CT515.33/DC24V

Delivery includes:

- Relay C33/DC24V
- Module CT515/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT515.34/DC24V

Delivery includes:

- Relay C34/DC24V
- Module CT515/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT515.39/DC24V

Delivery includes:

- Relay C39/DC24V
- Module CT515/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT516.31/DC24V

- Delivery includes:
- Relay C31L/DC24V
 - Module CT516/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

CT516.31R/...V

DC 24, 36V

Set Order-Nr.:

CT516.32/DC24V

- Delivery includes:
- Relay C32L/DC24V
 - Module CT516/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

CT516.32R/...V

DC 24, 36V

Set Order-Nr.:

CT516.33/DC24V

Delivery includes:

- Relay C33/DC24V
- Module CT516/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT516.34/DC24V

Delivery includes:


- Relay C34/DC24V
- Module CT516/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT516.39/DC24V

Delivery includes:

- Relay C39/DC24V
- Module CT516/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32



DC Voltage Monitoring-Set
DC Current Monitoring-Set

- Set-Delivery includes:
- Relay
 - Module
 - Front cover
 - Socket
 - Retaining clip



Monitoring Module

4 functions can be selected:
Overvoltage/undervoltage monitoring with adjustable hysteresis or 2 range monitors (INT or EXT). Adjustable alarm delay. LED display for errors and ok. Contact inspection window at the top. Manual safety operation.

Relay data's see:
Section Industrial Relays





Alarm delay t	0,1/0,5/2s
Reset time tR	100ms
Voltage tolerance	0,8-1,2Un
Power consumption	≤0,5W
Ambient temperature	-25...+60°C

Data at Tamb. = 20°C

CT524
DC Voltage Monitoring

Range: 0-30V
Umax: 40V



Set Order-Nr.:

CT524.35/DC24V

- Delivery includes:
- Relay C35/DC24V
 - Module CT524/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

Set Order-Nr.:

CT524.36/DC24V

- Delivery includes:
- Relay C36/UC12-240V
 - Module CT524/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32



Set Order-Nr.:

CT524.37/DC24V

- Delivery includes:
- Relay C37/UC12-240V
 - Module CT524/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

CT512
DC Current Monitoring

Range: 0-200mA
Imax: 300mA



Set Order-Nr.:

CT512.35/DC24V

- Delivery includes:
- Relay C35/DC24V
 - Module CT512/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

Set Order-Nr.:

CT512.36/DC24V

- Delivery includes:
- Relay C36/UC12-240V
 - Module CT512/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32



Set Order-Nr.:

CT512.37/DC24V

- Delivery includes:
- Relay C37/UC12-240V
 - Module CT512/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

CT515
DC Current Monitoring

Range: 0-2A
Imax: 3A



Set Order-Nr.:

CT515.35/DC24V

- Delivery includes:
- Relay C35/DC24V
 - Module CT515/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

Set Order-Nr.:

CT515.36/DC24V

- Delivery includes:
- Relay C36/UC12-240V
 - Module CT515/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32



Set Order-Nr.:

CT515.37/DC24V

- Delivery includes:
- Relay C37/UC12-240V
 - Module CT515/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

CT516
DC Current Monitoring

Range: 0-6A
Imax: 7A



Set Order-Nr.:

CT516.35/DC24V

- Delivery includes:
- Relay C35/DC24V
 - Module CT516/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

Set Order-Nr.:

CT516.36/DC24V


- Delivery includes:
- Relay C36/UC12-240V
 - Module CT516/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

Set Order-Nr.:

CT516.37/DC24V

- Delivery includes:
- Relay C37/UC12-240V
 - Module CT516/DC24V
 - Front cover FS-C
 - Socket C12B0
 - Retaining clip HF-32

UC Solid-State Relay




C35


Universal Solid-State Relay for AC or DC load

Highest switching frequency for virtually limitless life cycle due to solid-state operation. No external protective wiring required.

0,8A 10...265V~
1mA 10V



AC Solid-State Relay




C36


AC SS double-channel

Triac output, crossover switch. Built-in RC wiring protection. Specially designed for frequent switching cycles and inductive loads. Minimum load: 30mA

1A 20...265V~
30mA 20V



DC Solid-State Relay




C37

DC SS single-channel

Bounce- and wearing- free for DC loads (inductive/capacitive). Short-circuit/overload proof. No external wiring protection required.


5A 10...32V=
1mA 10V



DC Solid-State Relay




2x



C38

DC SS Relay double-channel
Bounce- and wearing- free for DC loads (inductive/capacitive). Short-circuit/overload proof. No external wiring protection required. 2A constant current per channel.

2A 10...32V=
1mA 10V



Set Order-Nr.:

CT524.38/DC24V

Delivery includes:

- Relay C38/UC12-240V
- Module CT524/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT512.38/DC24V

Delivery includes:

- Relay C38/UC12-240V
- Module CT512/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:

CT515.38/DC24V

Delivery includes:

- Relay C38/UC12-240V
- Module CT515/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32

Set Order-Nr.:


CT516.38/DC24V

Delivery includes:

- Relay C38/UC12-240V
- Module CT516/DC24V
- Front cover FS-C
- Socket C12B0
- Retaining clip HF-32



DC Voltage Monitoring-Set DC Current Monitoring-Set

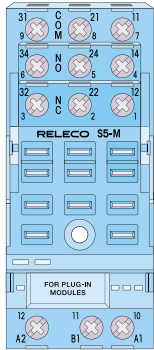


Set-Delivery includes:

- Relay
- Module
- Front cover
- Socket
- Retaining clip



High Power Relay DC




C5-A30X

Universal Power Relay 16A

With 3 power changeover-contacts this is the robust relay for AC and DC circuits ranging from 10mA 10V.

16A 400V~
10mA 10V



Set Order-Nr.:

CT524.5-A30/DC24V R

Delivery includes:

- Relay C5-A30/DC24V
- Module CT524/DC24V R
- Front cover FS-C5
- Socket S-5M
- Retaining clip S3-C

Set Order-Nr.:

CT512.5-A30/DC24V R

Delivery includes:

- Relay C5-A30/DC24V
- Module CT512/DC24V R
- Front cover FS-C5
- Socket S-5M
- Retaining clip S3-C

Set Order-Nr.:

CT515.5-A30/DC24V R

Delivery includes:

- Relay C5-A30/DC24V
- Module CT515/DC24V R
- Front cover FS-C5
- Socket S-5M
- Retaining clip S3-C



Set Order-Nr.:

CT516.5-A30/DC24V R

Delivery includes:

- Relay C5-A30/DC24V
- Module CT516/DC24V R
- Front cover FS-C5
- Socket S-5M
- Retaining clip S3-C

High Power Relay DC




C5-M10X

Highpower Relay, in particular for DC loads upto 10A 220V= (DC1)

With 2 NO contacts in series and a blow magnet for safe arc extinguishing.

16A 400V~
10mA 10V



Set Order-Nr.:

CT524.5-M10/DC24V R

Delivery includes:

- Relay C5-M10/DC24V
- Module CT524/DC24V R
- Front cover FS-C5
- Socket S-5M
- Retaining clip S3-C

Set Order-Nr.:

CT512.5-M10/DC24V R

Delivery includes:

- Relay C5-M10/DC24V
- Module CT512/DC24V R
- Front cover FS-C5
- Socket S-5M
- Retaining clip S3-C

Set Order-Nr.:

CT515.5-M10/DC24V R

Delivery includes:

- Relay C5-M10/DC24V
- Module CT515/DC24V R
- Front cover FS-C5
- Socket S-5M
- Retaining clip S3-C

Set Order-Nr.:

CT516.5-M10/DC24V R

Delivery includes:

- Relay C5-M10/DC24V
- Module CT516/DC24V R
- Front cover FS-C5
- Socket S-5M
- Retaining clip S3-C